

WAVE Series - WCX Convex Open Upright Cases



Models

FRCX45
FRCX67
FRCX90

Applications

- Forced air refrigeration
- Medium temperature integrated average 41°F
- For fresh cut flowers
- Designed to be used with straight and curved merchandisers to create WAVE lineups

Convex curved open upright merchandisers for floral products

Standard Features

- Black interior
- Black exterior
- No end panels (specify ends per lineup)
- Open reach-in front
- Galvanized exterior back panel
- 13" bucket support shelves (4 levels)
- T-8 top light
- Glass upper & lower front panels
- Electrical leads
- Top electrical access
- Base rail system for shims
- Remote refrigeration with TXV piped at base
- ETL conforms to UL 471

Options

- Laminate exterior
- Full or cutaway end panels
- Black exterior back panel
- 2" bumper on ends
- Remote refrigeration with TXV piped at top
- Fresh Flow® automatic watering system

ONE PART PASSION, TWO PARTS SCIENCE




Specifications - WCX Convex Open Upright

Model	LxDxH
FRCX45	63"x43-1/4"x85-13/16"
FRCX67	90-1/2"x43-1/4"x85-13/16"
FRCX90	114-1/4"x43-1/4"x85-13/16"

Bucket Capacities				
Model	Standard Configuration		W/ Optional Fresh Flow System	
FRCX45	Shelving = (24) 8"D x 13"T	Deck = (7) 9"D x 10"T	Fresh Flow = (22) 8"D x 13"T	Deck = (7) 9"D x 10"T
FRCX67	Shelving = (32) 8"D x 13"T	Deck = (9) 9"D x 10"T	Fresh Flow = (30) 8"D x 13"T	Deck = (9) 9"D x 10"T
FRCX90	Shelving = (42) 8"D x 13"T	Deck = (12) 9"D x 10"T	Fresh Flow = (40) 8"D x 13"T	Deck = (12) 9"D x 10"T

STANDARD

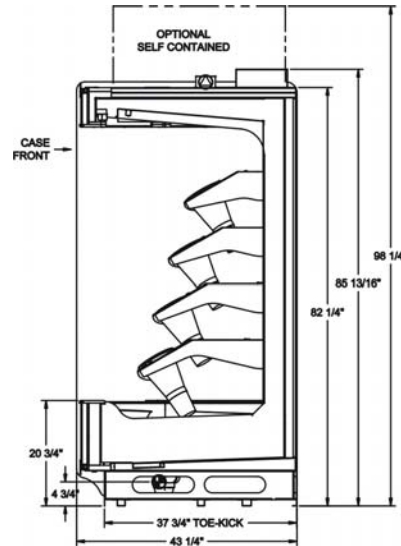

IMPORTANT NOTES


INTENDED ENVIRONMENT

Designed to operate in ambient conditions of 75°F with 55% relative humidity.


INTENDED USE

Refrigerated floral products


Plan View - FRCX45

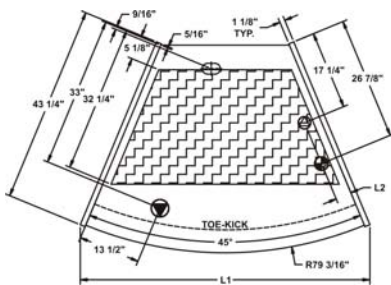

Plan View - FRCX67

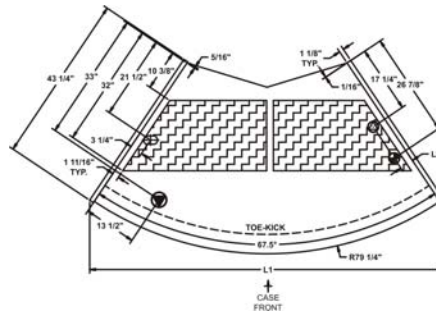

Plan View - FRCX90

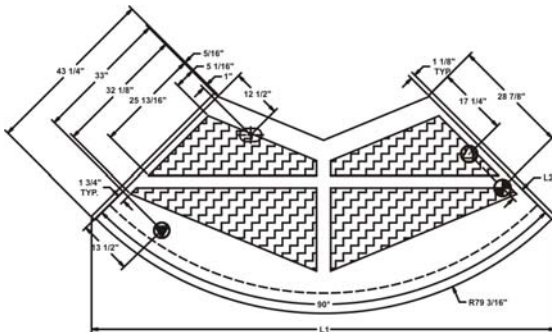

INFORMATION IS SUBJECT TO CHANGE WITHOUT NOTICE.



For more information on any of our products or services please visit us on the web at:

www.structuralconcepts.com