

• **CSC3223**

30-7/8"L x 22-5/8"D x 36-3/8"H

Included

- 6' Straight blade power cord
- Black interior
- Black trim
- Glass end
- Glass swinging front doors
- Holds (4) 18" x 26" trays
- LED 3500K side lights
- Light switch in base
- NOTE: Trays not supplied with unit.
- One year parts & labor warranty
- Tray support non-lighted shelves, (trays not included)




CSC3223

Specify	Standard Features	Additional Options
BASE	<ul style="list-style-type: none"> • 6"H base w/bag area - Gray 	<ul style="list-style-type: none"> • 2"H solid base w/o bag area - Black • 2"H solid base w/o bag area - Gray • 6"H base w/bag area - Black
FRONT DOOR GRAPHICS	<ul style="list-style-type: none"> • None 	<ul style="list-style-type: none"> • Front door graphics (customer supplied)
HEADER GRAPHICS	<ul style="list-style-type: none"> • None 	<ul style="list-style-type: none"> • Header sign graphics (customer supplied) • Header sign, plain
REAR DOORS	<ul style="list-style-type: none"> • None (solid back panel) 	<ul style="list-style-type: none"> ¹ • Clear glass rear swinging doors w/o lock • Mirror back panel
MISCELLANEOUS		<ul style="list-style-type: none"> • Second year parts & labor warranty


Option Notes: 1 - Increases depth of case to 23-5/8"D

Intended Environment: Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information below.		
Zone	Intended Product To Be Displayed	Warmest Avg Prod Temp ° F
1	Unpackaged non-refrigerated products	Ambient

PLAN VIEW

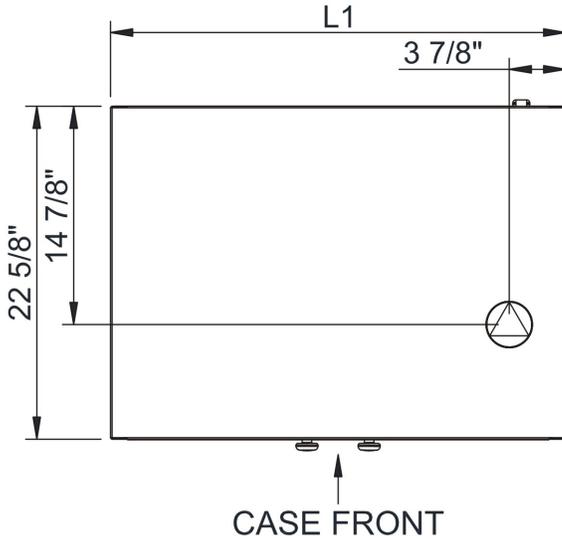

SIDE VIEW

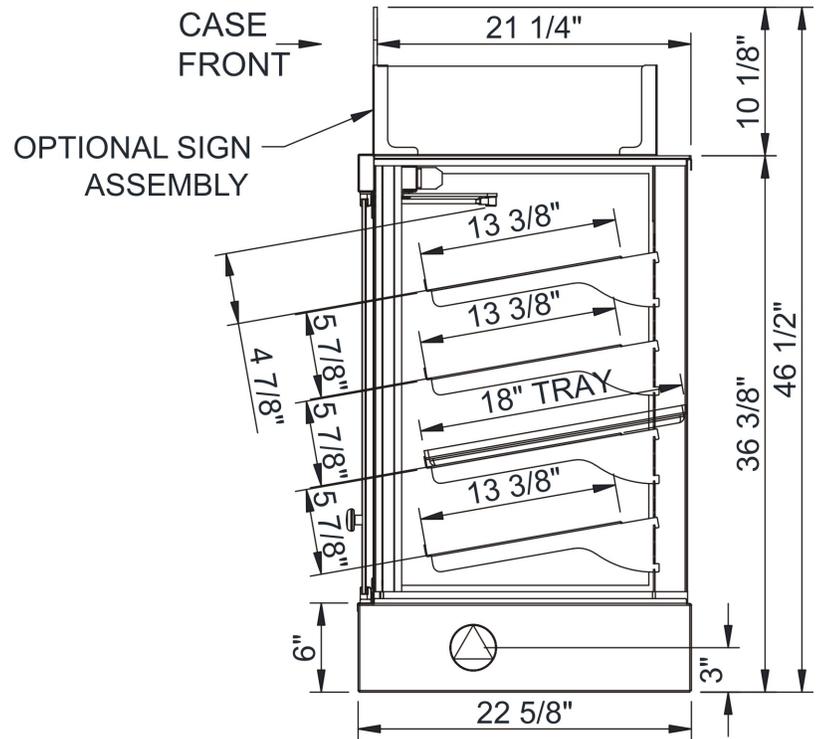

NOTE: ALL DIMENSIONS APPROXIMATE

- ⊗ ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6" LEADS OR POWER CORD).
- ⊙ LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY (SUPPLIED WITH 3/4" OR 1 1/2" PVC TUBE).
- ⊕ REFRIGERATION LINE CONNECTION.
- ⊞ REMOTE FLOOR SINK & UTILITIES ACCESS AREA.
- ⊞ SELF-CONTAINED CASE SERVICE ACCESS AREA.
- ⊞ DRY CASE SERVICE ACCESS AREA.

Model Technical Specifications																	
Model	L"	L1"	L2"	System Circuit Volts		Phs	Freq	Amps ***	Watts	Wires	NEMA Plug	SST	Conv. Rack BTUH	Para. Rack BTUH	Est Wt		
CSC3223	N/A	30.88	.00	Ambient/Lights (N/A)		Circuit #1	110-120	1	60	0.70	7	2+G	5-15P	N/A	N/A	N/A	250

*** Does not include electric defrost on freezer models.

Regulatory Approvals:	
All Models	ETL Listed to UL 65 ETL Sanitation to NSF/ANSI 2



Important Notes:

- 1) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle
- 2) 24 1/8" Minimum door entry clearance required (Without shipping skid).

⚠ WARNING: This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.