

# Technical Information

Oasis - Refrigerated & Heated Self-Service Case

Structural Concepts®

DELIVERING FRESH. ALWAYS.™

## DIMENSIONS / SHIPPING

Model	L"	L1"	L2"	Est Wt (lbs)
B3924RH	36.500	39.000	0.000	N/A

## ELECTRICAL

Model	System Circuit Volts			Ph	Frq	Rated Load Amps	Min Cir Amps	Max OCP Amps	Watts	Wires	NEMA Plug	Amps Lights	Amps Fans	Amps Anti-Sweats	Amps Misc/Refrig/Heat
B3924RH	Self-Contained (R513A)	Circuit #1	110-120	1	60	20.69	30	30	1,792	2+G	5-30P or L5-30P	1.40	0.90	10.29	8.10

## REFRIGERATION

Model	Zone	Section	System	Env't	REMOTE REFRIGERATION					GLYCOL / R744 REFRIGERATION			
					SST (°F)	Conv. Rack BTUH	Para. Rack BTUH	Defrost Interval (Hrs)	Defrost Duration	Total GPM	Pressure Drop (psi)	Concent (%)	Liquid Temp (°F)
B3924RH	All	Main	Self-Contained-R513A	Type I	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

## INTENDED ENVIRONMENT

Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise under Env't above.

## WARMEST AVERAGE PRODUCT TEMP & INTENDED USE OF ZONES

Zone	Temp (°F)	Intended Use
1	40	Packaged refrigerated products
2	160	Packaged heated product

## IMPORTANT NOTES

- 1) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle
- 2) Performance issues (product temperatures, water on floor, etc.) caused by adverse conditions are not covered by warranty.
- 3) Keep unit at least 15' from exterior doors, overhead HVAC vents, or any air curtain disruption.
- 4) Do not expose unit to direct sunlight or any heat source (ovens, fryers, etc.).
- 5) Compressor air lower front intake and upper front discharge. Front panel cannot be blocked.

## REGULATORY

All Models	ETL Listed to UL 197 ETL Listed to CAN/CSA 22.2 No. 109 ETL Sanitation to NSF/ANSI 4
------------	--





## Technical Information

## Oasis - Refrigerated & Heated Self-Service Case

# Structural Concepts®

DELIVERING FRESH. ALWAYS.™

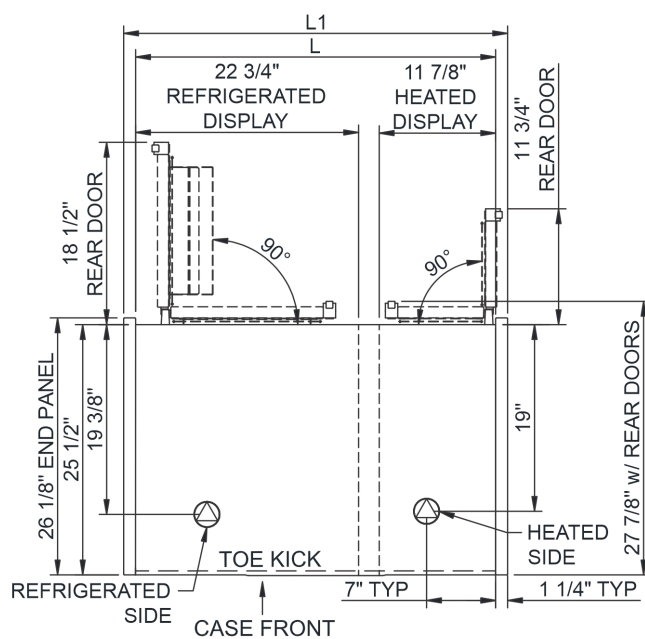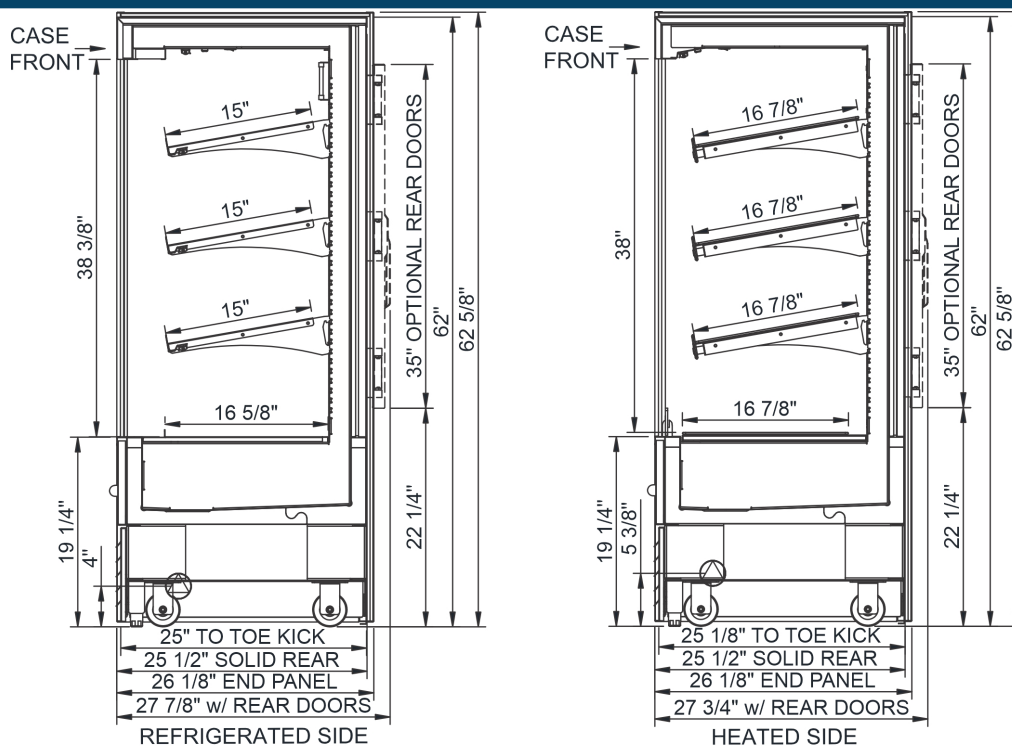

REFRIGERATION CONNECTIONS ONLY ACCESSIBLE  
BY PULLING OUT CONDENSOR DRAWER

NOTE: ALL DIMENSIONS APPROXIMATE

- |   |  |   |   |   |   |
|---|--|---|---|---|---|
|  | <b>ELECTRICAL JUNCTION BOX</b><br>(SUPPLIED WITH 6" LEADS OR POWER CORD).                      |  | <b>REFRIGERATION LINE CONNECTION.</b>                 |  | <b>SELF-CONTAINED CASE SERVICE ACCESS AREA.</b> |
|  | <b>LOCATION OF DRAIN TUBE FOR REMOTE REF.</b><br>(ONLY SUPPLIED WITH 3/4" OR 1 1/2" PVC TUBE). |  | <b>REMOTE FLOOR SINK &amp; UTILITIES ACCESS AREA.</b> |  | <b>DRY CASE SERVICE ACCESS AREA.</b>            |