

# Fusion

GMSSV 52"H Refrigerated Self-Service Case

**Structural Concepts®**

DELIVERING FRESH. ALWAYS.™

(Lengths do not include 1-1/8" end panels)

- **GMSSV452R**                    48-3/4"L x 43"D x 51-5/8"H
- **GMSSV552R**                    60-5/8"L x 43"D x 51-5/8"H
- **GMSSV652R**                    73-1/8"L x 43"D x 51-5/8"H
- **GMSSV852R**                    97-1/2"L x 43"D x 51-5/8"H

## Included

- Integrated average product temperature of 40°F or less
- LED top & shelf lights
- One year parts & labor; 5 year compressor warranty
- Stainless steel rear exterior




**GMSSV652R**

Specify	Standard Features	Additional Options
<b>EXTERIOR COLOR</b>	• Laminate (stock colors)	• Laminate (non-stock colors) • Powder coated (stock/non-stock colors) • Powder coated Silversan Black • Stainless steel
<b>INTERIOR COLOR</b>	• Powder coated Silversan Black	• Stainless steel
<b>LOWER FRONT PANEL COLOR</b>	• Powder coated Silversan Black	• Powder coated (stock/non-stock colors) • Stainless steel
<b>BASE SUPPORT</b>	• Casters w/ levelers (self-cont.)	• Rail system for shims (n/a w/ s/c ref.)
<b>BUMPER FRONT</b>	• 1" Boston bumper (specify color)	• 1" Stainless steel plate rail bumper
<b>END PANELS</b>	• Full w/stainless steel mirror interior	• Cutaway w/glass • None (specify per line-up)
<b>PRICE TAG MOLDING</b>	• None	• 1" Price tag molding (black or silver) • Universal price tag molding (clear w/ open top)
<b>SHELVING</b>	• 16" & 20" Solid shelving	• 16" & 20" Glass shelving
<b>LIGHTS</b>	• LED 3500K w/ frosted lens	• LED 4000K w/ frosted lens
<b>ELECTRICAL CONNECTION</b>	• 6' Straight blade power cord (self-cont.)	• 6' Locking power cord (self-cont.) • Electrical leads (remote)
<b>REFRIGERATION</b>	• Breeze self-contained refrigeration	• Remote DX refrigeration • Remote w/thermostat, solenoid & TXV
<b>SENSOR</b>	• None	• CPC discharge air sensor (remote)
<b>ACCESSORIES</b>		• Clean Sweep® coil cleaner (self-cont.) • Drain strainer • Night curtain, retractable, non-locking • Removable wire security cover, locking


**Intended Environment:** Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information below.

Zone	Intended Product To Be Displayed	Warmest Avg Prod Temp ° F
1	Packaged refrigerated products	40

### PLAN VIEW

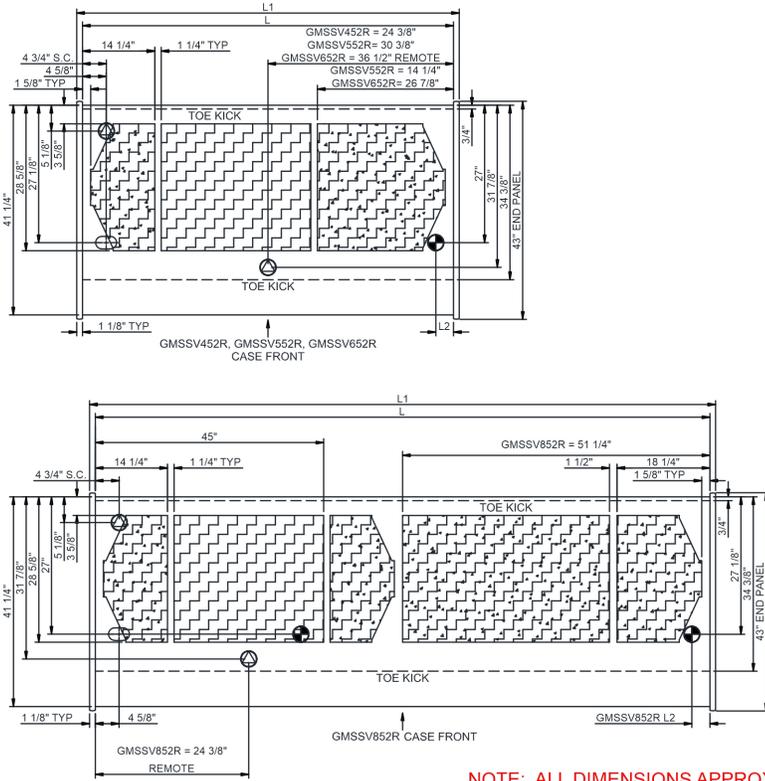

### SIDE VIEW

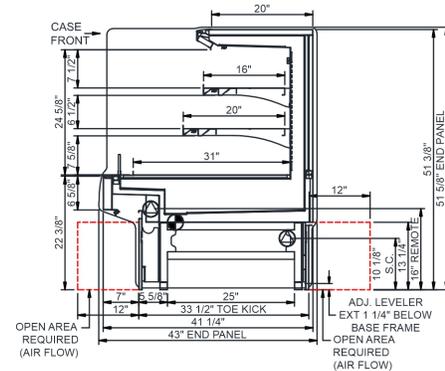

**NOTE: ALL DIMENSIONS APPROXIMATE**

- ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6" LEADS OR POWER CORD).
- LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY (SUPPLIED WITH 3/4" OR 1 1/2" PVC TUBE).

- REFRIGERATION LINE CONNECTION.
- REMOTE FLOOR SINK & UTILITIES ACCESS AREA.

- SELF-CONTAINED CASE SERVICE ACCESS AREA.
- DRY CASE SERVICE ACCESS AREA.

### Model Technical Specifications

Model	L"	L1"	L2"	System Circuit Volts		Phs	Freq	Amps ***	Watts	Wires	NEMA Plug	SST	Conv. Rack RTU#	Para. Rack RTU#	Est Wt	
				Remote (DX)	Self-Contained (R449A)											
GMSSV452R	48.75	51.00	3.50	Remote (DX)	Circuit #1	110-120	1	60	1.18	86	2+G	Leads Multiple	20.00	3201	2964	1,250
				Remote (R744 TRANSCRIT)	Circuit #1	110-120	1	60	1.18	149	2+G	Leads Multiple		3201	2964	
				Self-Contained (R449A)	Circuit #1	110-120	1	60	15.36	1,333	2+G	5-20P or L5-20P	N/A	N/A	N/A	
GMSSV552R	60.63	62.88	3.50	Remote (DX)	Circuit #1	110-120	1	60	1.54	81	2+G	Leads Multiple	24.00	3499	3240	1,000
				Self-Contained (R449A)	Circuit #1	208-240	1	60	9.37	1,770	2+G	6-20P or L6-20P	N/A	N/A	N/A	
GMSSV652R	73.13	75.38	3.50	Remote (DX)	Circuit #1	110-120	1	60	2.54	131	2+G	Leads Multiple	20.00	5270	4880	900
				Self-Contained (R449A)	Circuit #1	208-240	1	60	11.55	2,038	2+G	6-20P or L6-20P	N/A	N/A	N/A	
GMSSV852R	97.50	99.75	3.50	Remote (DX)	Circuit #1	110-120	1	60	3.03	274	2+G	Leads Multiple	20.00	6847	6340	1,500
				Self-Contained (R449A)	Circuit #1	208-240	1	60	13.36	2,533	2+G	6-20P or L6-20P	N/A	N/A	N/A	

\*\*\* Does not include electric defrost on freezer models.

#### Regulatory Approvals:

All Models  
 Accordance with AHRI Std 1200  
 ETL Listed to UL 471  
 ETL Listed to CAN/CSA 22.2 No. 120  
 ETL Sanitation to NSF/ANSI 7



In Accordance with  
**AHRI Std 1200**

**DOE 2017**  
 Energy Efficiency  
 Compliant

#### Important Notes:

- 1) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle
- 2) 45" minimum door entry clearance required (without shipping skid).
- 3) Units must be shimmed during installation to ensure the unit is level and plumb.

**⚠ WARNING:** This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).